

## GEMÜ 4242

### Combi switchbox with integrated pilot valve



#### Features

- Fieldbus connection AS-Interface (3.0), ASi-5 and DeviceNet (optional)
- Communication and programming interface IO-Link
- Adjustable switch point tolerances
- Speed<sup>AP</sup> function for fast mounting and initialization
- High visibility position indicator by LED
- Can be fitted to GEMÜ valves or third-party actuators
- On-site or remote end position programming via programming input
- Integrated manual override

#### Description

The GEMÜ 4242 combi switchbox is suitable for installation on pneumatically operated linear actuators. The position of the valve spindle is reliably electronically detected and evaluated using play-free and non-positive mounting. Integrated pilot valves enable direct activation of the process valve connected to them. Intelligent microprocessor-controlled functions facilitate commissioning and support during operation. The current position of the valve is displayed via high-visibility LEDs and fed back via electrical signals.

#### Technical specifications

- **Ambient temperature:** 0 to 60 °C
- **Linear measuring range:** 2 to 75 mm
- **Flow rate:** 14 NI/min | 145 NI/min | 23 NI/min | 250 NI/min
- **Supply voltage:** 24 V DC | or as per fieldbus specification
- **Mode of action:** Double acting | Single acting
- **Communication modes:** ASi-5 | AS-Interface | DeviceNet | IO-Link
- **Electrical connection types:** M12 plug
- **Protection class:** IP 65, IP 67
- **Conformities:** ATEX | EAC | ETL Listed C US | Functional safety | IECEx

Technical data depends on the respective configuration



further information  
webcode: GW-4242



## Product line




	GEMÜ 4240	GEMÜ 4241	GEMÜ 4242
<b>Linear measuring range</b>	5 to 75 mm	5 to 75 mm	2 to 75 mm
<b>Radial measuring range</b>	0 - 90°	0 - 90°	0 - 90°
<b>Ambient temperature</b>	0 to 60 °C	0 to 50 °C	0 to 60 °C
<b>Flow rate</b>			
14 NI/min	-	-	●
145 NI/min	-	-	●
23 NI/min	-	-	●
250 NI/min	●	●	●
<b>Electrical connection types</b>			
Cable glands	●	●	-
Connectors	-	-	●
<b>Switch types</b>			
Microswitch	●	-	-
2-wire proximity switch (NAMUR)	●	●	-
3-wire proximity switch	●	-	-
<b>Communication modes</b>			
ASi-5	-	-	●
AS-Interface	-	-	●
DeviceNet	-	-	●
IO-Link	-	-	●
<b>Supply voltage</b>			
24 V DC	●	-	●
250 V AC	●	-	-
8 V DC	●	●	-
or as per fieldbus specification	-	-	●
<b>Conformities</b>			
ATEX	-	●	●
EAC	-	●	●
ETL Listed C US	-	-	●
Functional safety	-	-	●
IECEX	-	●	●

## Product description

Size 1, 30 mm



Size 2, 75 mm

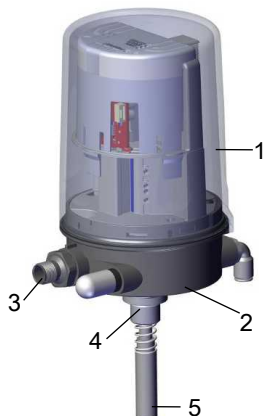

Size 2, 30 mm



Item	Name	Materials		
		Size 1, 30 mm	Size 2, 75 mm	Size 2, 30 mm
1	Housing cover – standard version:	PC	PC	PC
	Housing cover – compact version:	PP	-	-
2	Housing base	Anodized aluminium or stainless steel	PPS or stainless steel	PPS or stainless steel
3	Electrical connection	Threaded piece: Stainless steel (1.4305) insert: PA	Threaded piece: PPS or stainless steel (1.4305) insert: PA	Threaded piece: PPS or stainless steel (1.4305) insert: PA
4	Adapter piece	Stainless steel (1.4305)	Stainless steel (1.4305)	Stainless steel (1.4305)
5	Mounting kit, valve-specific	Valve-specific materials	Valve-specific materials	Valve-specific materials
	Seals	EPDM and NBR	NBR with PPS housing base NBR, EPDM and VMQ with stainless steel housing base	NBR with PPS housing base NBR, EPDM and VMQ with stainless steel housing base

## GEMÜ CONEXO

The interaction of valve components that are equipped with RFID chips and an associated IT infrastructure actively increase process reliability.



Thanks to serialization, every valve and every relevant valve component such as the body, actuator or diaphragm, and even automation components, can be clearly traced and read using the CONEXO pen RFID reader. The CONEXO app, which can be installed on mobile devices, not only facilitates and improves the "installation qualification" process, but also makes the maintenance process much more transparent and easier to document. The app actively guides the maintenance technician through the maintenance schedule and directly provides him with all the information assigned to the valve, such as test reports, testing documentation and maintenance histories. The CONEXO portal acts as a central element, helping to collect, manage and process all data.


**For further information on GEMÜ CONEXO please visit:**

[www.gemu-group.com/conexo](http://www.gemu-group.com/conexo)

### Ordering

GEMÜ Conexo must be ordered separately with the ordering option "CONEXO".

### Installing the RFID chip (1)

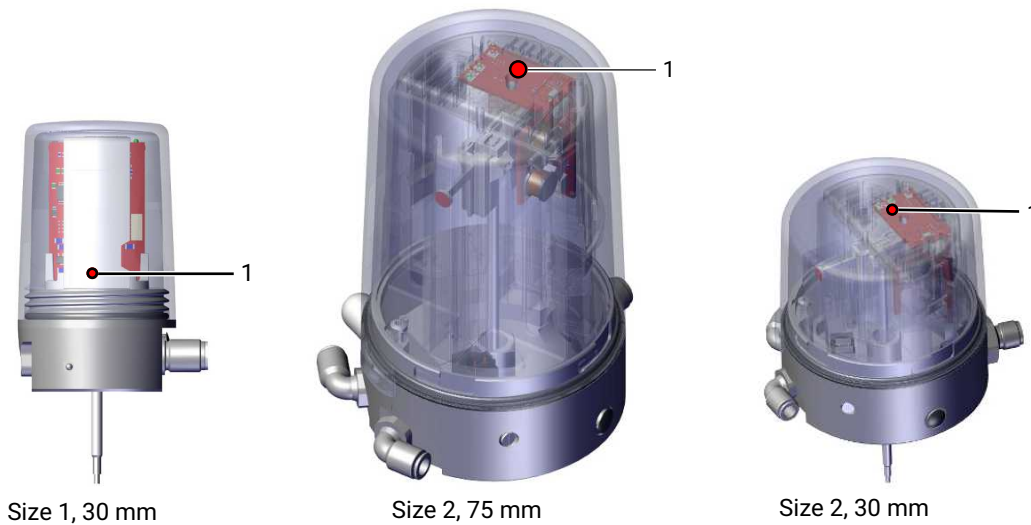

## Availability

Option	Code	Size 1	Size 2	
			75 mm	30 mm
Housing material <sup>1)</sup>	<b>01</b>	-	X**	
	<b>07</b>	X	X(ASi-5 only)	
	<b>14</b>	X	-	
Function <sup>2)</sup>	<b>01</b>	X	X	
	<b>02</b>	X**	X*	-
	<b>K1</b>	X**	-	
Flow rate <sup>3)</sup>	<b>01</b>	X	-	
	<b>02</b>	X	-	
	<b>03</b>	-	X**	
	<b>R3</b>	-	X(ASi-5 only)	
Special version <sup>4)</sup>	<b>Y</b>	X**	X**	On request
	<b>X</b>	X	X	On request

\* Double acting for size 2 only possible with PPS base  
(housing material code 01 or flow rate code 03)

\*\* Not possible in ASi-5 (fieldbus code A5 or A5D)

### 1) Housing material

Code 01: PPS base, PC cover

Code 07: Stainless steel base, PC cover

Code 14: Aluminium base, PC cover

### 2) Function

Code 01: Combi switchbox, single acting

Code 02: Combi switchbox, double acting

Code K1: Combi switchbox, compact version, single acting

### 3) Flow rate

Code 01: 14 NI/min, size 1

Code 02: 23 NI/min (Booster), size 1

Code 03: 250 NI/min, size 2

Code R3: 145 NI/min, size 2

### 4) Special version

Code Y: NEC 500 and UL/CSA approval

Code X: ATEX (2014/34/EU), IECEx

## Overview of available functions

Function	Version						
	24 V	IO-Link	AS-Interface				DeviceNet
			AS-Interface (3.0)			ASi-5	
			A2	A3	A4	A5/A5D	
Optical high visibility position indicator	X	X	X	X	X	X	X
Deactivation of high visibility position indicator	-	X	-	-	X	X	X
On-site programming	X	X	X	X	X	X	X
Deactivation of on-site programming	-	X	-	-	X	X	X
Position feedback open	X	X	X	X	X	X	X
Position feedback closed	X	X	X	X	X	X	X
Feedback for operating mode	-	X	X	X	X	X	X
Location function	-	X	-	-	X	X	X
Inversion of LED colours	*	X	*	*	X	X	X
Inversion of feedback signals	-	X	-	-	X	X	X
Switch point setting (tolerance)	-	X	X	X	X	X	X
Stroke reduction alarm	-	X	-	-	-	X	X
Reading option for initialized end positions	-	X	-	-	-	X	X
Reading option for current position	-	X	-	-	-	X	X
Error signalling	X	X	X	X	X	X	X
Operating hours counter	-	X	-	-	-	X	-
Cycle counter (on-site)	-	X	-	-	-	X	X
Total cycle counter	-	X	-	-	-	X	X
Default	-	X	-	-	-	X	Via DeviceNet
Digital parameter representation	-	X	-	-	-	X	-
Pilot valve actuation counter (on-site)	-	-	-	-	-	X	-
Total actuation counter (pilot valve)	-	-	-	-	-	X	-
Configurable process data variables	-	-	-	-	-	X	-
Autonomous end position detection	-	-	-	-	-	X	-
App operating option (BLE)	-	-	-	-	-	X	-
Condition monitoring sensor system	-	-	-	-	-	X	-

\* Function cannot be configured but can be selected as an ordering option

## Order data

The order data provide an overview of standard configurations.

Please check the availability before ordering. Other configurations available on request.

Note: A valve specific mounting kit is required for assembly. For designing the mounting kit, the valve type, nominal size, control function and actuator size must be stated.

Information for AS-Interface 5 versions: If there are customer or system restrictions that prohibit the use of a Bluetooth wireless interface, it is recommended to use an order variant with a deactivated BLE interface. For versions without a deactivated BLE interface, the option also exists to deactivate the interface independently later.

The versions with fieldbus ASi-5 are (temporarily) only available in the following basic configuration:

### Size 1:

Fieldbus AS-Interface 5, 96 slaves, BLE (code A5),  
Housing material: Stainless steel base (code 07),  
Single acting (code 01),  
M12 plug, 5-pin (code 01),  
Pneumatic 6 mm angled connection (code 04),  
Without manual override (code 01).  
23 NI/min flow rate (code 02),  
30 mm travel sensor length (code 030),  
Without special function (code -) or with ATEX special function (code X)

### Size 2:

Fieldbus AS-Interface 5, 96 slaves, BLE (code A5),  
Housing material: Stainless steel base (code 07),  
Single acting (code 01),  
M12 plug, 5-pin, stainless steel (code S1),  
Pneumatic 6 mm angled connection (code 04),  
No code option (code 00),  
145 NI/min flow rate,  
30 mm travel sensor length (code 030) or 75 mm (code 075),  
Without special function (code -) or with ATEX special function (code X)

**Order codes**

1 Type	Code
Combi switchbox	4242

2 Fieldbus	Code
Without, 24 V DC version	000
AS-Interface, 31 slaves, 4I/4O	A2
AS-Interface, 62 slaves, 4I/3O	A3
AS-Interface, 62 slaves, 8I/8O	A4
AS-Interface 5, 96 slaves, BLE	A5
AS-Interface 5, 96 slaves, BLE deactivated	A5D
DeviceNet	DN
IO-Link	IOL

3 Accessory	Code
Accessory	Z

4 Housing material	Code
Stainless steel base, PC cover	07
Aluminium base, PC cover	14
PPS base, PC cover	01

5 Function	Code
Combi switchbox, single acting	01
Combi switchbox, double acting	02
Combi switchbox, compact version, single acting	K1

6 Electrical connection	Code
M12 plug, 5-pin	01
M12 plug, 8-pin	02
M12 plug, 5-pin, stainless steel, size 2	S1
M12 plug, 8-pin, stainless steel, size 2	S2

7 Pneumatic connection	Code
M5 connection thread for size 1, G1/8 connection thread for size 2	01
Air supply 4 mm angled connection, exhaust air 4 mm angled connection	02
Air supply 4 mm T-connection, exhaust air 4 mm angled connection	03
Air supply 6 mm angled connection, exhaust air 6 mm angled connection	04
Air supply 6 mm T-connection, exhaust air 6 mm angled connection	05
M5 connection thread for size 1, G1/8 connection thread for size 2 (for IP67 or piped air outlet)	E1
Air supply 6 mm angled connection, exhaust air 6 mm angled connection (for IP67 or piped air outlet)	E4
Air supply 1/4" angled connection, exhaust air 1/4" angled connection	U8

8 Option	Code
Without	00
Manual override	01

8 Option	Code
Inversed LED colours	40
Inversed LED colours, manual override	41
Inverted LED colours Deactivated high visibility position feedback	80

9 Flow rate	Code
14 NI/min, size 1	01
23 NI/min (Booster), size 1	02
250 NI/min, size 2	03
145 NI/min, size 2	R3

10 Travel sensor version	Code
Travel sensor 30 mm in length	030
Travel sensor 75 mm in length	075

11 Special version	Code
Without	
ATEX (2014/34/EU), IECEx	X
NEC 500 and UL/CSA approval	Y



**Order example**

Ordering option	Code	Description
1 Type	4242	Combi switchbox
2 Fieldbus	000	Without, 24 V DC version
3 Accessory	Z	Accessory
4 Housing material	07	Stainless steel base, PC cover
5 Function	01	Combi switchbox, single acting
6 Electrical connection	01	M12 plug, 5-pin
7 Pneumatic connection	01	M5 connection thread for size 1, G1/8 connection thread for size 2
8 Option	01	Manual override
9 Flow rate	01	14 NI/min, size 1
10 Travel sensor version	030	Travel sensor 30 mm in length
11 Special version		Without

## Technical data

### Medium

<b>Working medium:</b>	Compressed air and inert gases Quality classes to DIN ISO 8573-1
<b>Dust content:</b>	Class 3, max. particle size 5 µm, max. particle density 5 mg/m <sup>3</sup>
<b>Pressure dew point:</b>	<b>Size 1</b> Class 3, max. pressure dew point -20 °C <b>Size 2</b> Class 4, max. pressure dew point +3 °C
<b>Oil content:</b>	<b>Size 1</b> Class 3, max. oil concentration 1 mg/m <sup>3</sup> <b>Size 2</b> Class 5, max. oil concentration 25 mg/m <sup>3</sup>

### Temperature

<b>Ambient temperature:</b>	Standard or with special version code Y	0–60 °C
	Special version code X	0–50 °C*
	*for ASi-5 version	0–60 °C
<b>Control medium temperature:</b>	0 – 50 °C	
<b>Storage temperature:</b>	-10 – 70 °C	

### Pressure

<b>Operating pressure:</b>	<b>Size 1</b>	<b>Size 2</b>
	1 to 10 bar (at 40 °C) 1 to 8 bar (at 60 °C)	2 to 7 bar

Observe the maximum control pressure of the valve actuator.

<b>Flow rate:</b>	<b>Size 1</b>	<b>Size 2</b>
	Flow rate code 01: 14 NI/min Flow rate code 02 (Booster): 23 NI/min	Flow rate code 03: 250 NI/min Flow rate code R3: 145 NI/min

### Product conformities

<b>EMC Directive:</b>	2014/30/EU Class: B Group: 1 Technical standards used:
-----------------------	---

24 V	
<b>Interference emission</b>	EN 61000-6-3
<b>Interference resistance</b>	EN 61000-6-2

**EMC Directive:**

IO-Link	
<b>Interference emission</b>	EN 61000-6-3
<b>Interference resistance</b>	EN 61000-6-2
AS-Interface	
<b>Interference emission</b>	In accordance with AS-Interface Spec. 3.0
<b>Interference resistance</b>	In accordance with AS-Interface Spec. 3.0
<b>Interference emission/interference resistance</b>	EN 62026-2:2013 + A1:2019
DeviceNet	
<b>Interference emission</b>	EN 61000-6-3
<b>Interference resistance</b>	EN 61000-6-2
AS-Interface 5	
<b>Interference emission:</b>	ASi-5 Spec V1.04
<b>Interference resistance:</b>	ASi-5 Spec V1.04
<b>Interference emission/interference resistance</b>	EN 62026-2:2013 + A1:2019

**RoHS Directive:**

2011/65/EU

**Radio Equipment Directive (RED):**

2014/53/EU



**Technical standards used (ASi-5 only):**

Standard regarding the use of radio frequencies: EN 300 328 V2.2.2 (2019-07)  
 Electromagnetic compatibility (EMC) for radio devices and services: EN 301 489-1 V2.2.3 (2019-11)  
 EN 301 489-17 V3.2.4 (2020-09)  
 Electrical safety: EN 61010-1:2010 + A1:2019 + A1:2019/AC:2019



**Explosion protection:**

ATEX (2014/34/EU) and IECEx\*, order code special version X  
 \* IECEx **not** for ASi-5 version  
 NEC 500 (ISA 12.12.01), order code Special version Y

**ATEX marking:**

Gas:  II 3G Ex ec nC IIC T4 Gc X  
 Dust:  II 3D Ex tc IIIC T80°C\* Dc X  
 \*T100°C for ASi-5 version

**IECEx marking:**

Gas:  Ex ec nC IIC T4 Gc  
 Dust:  Ex tc IIIC T80°C Dc  
 Certificate: IECEx IBE 19.0011 X

**NEC marking:**

Class I, Division II, Groups C & D, T4

**Approvals:**

	24 V	AS-Interface (3.0)	ASi-5	IO-Link	DeviceNet
<b>Fieldbus / communication</b>	-	Travel sensor version 030: AS-Interface certificate no. 96001 Travel sensor version 075: AS-Interface certificate no. 125601	AS-Interface certificate no. 137301	Travel sensor version 030: IO-Link specification V 1.1 Travel sensor version 075: IO-Link specification V 1.1	TBD

**SIL:**

**Product description:** GEMÜ electrical position indicator 4242  
**Device type:** B  
**Valid software version:** V1.1.X.X  
**Safety function:** The fail-safe state is defined as a High (24 V DC) signal at pin 4 (device version 24 V IO-Link), if the current position of the integrated travel sensor is smaller than the switch point CLOSED (default setting 12%).  
**HFT (Hardware Fault Tolerance):** 0  
**MTTR (Mean Time To Restoration):** 24 hours  
**MTBF (Mean Time Between Failures):** 232 years  
 Further information, see SIL safety manual

**Mechanical data**

**Installation position:** Optional

**Weight:**

	Size 1	Size 2	
		75 mm	30 mm
Housing material code 14 (aluminium base): 320 g		Housing material code 01 (PPS base): 420 g	Housing material code 01 (PPS base): 350 g
Housing material code 07 (stainless steel base): 600 g		Housing material code 07 (stainless steel base): 1150 g	Housing material code 07 (stainless steel base): 1080 g

**Travel sensor:**

	Size 1	Size 2	
		75 mm	30 mm
<b>Minimum stroke:</b>	2 mm	5 mm	2 mm
<b>Maximum stroke:</b>	30 mm*	75 mm	30 mm
<b>Hysteresis:</b>	0.2 mm	0.5 mm	0.2 mm
<b>Accuracy:</b>	0.2% Full Scale		

\* For ASi-5, the theoretical maximum stroke is 40 mm. However, it is limited to 30 mm by the mounting kit.

**Operating conditions**

**Ambient conditions:** Use indoors and outdoors  
 Dry and wet environments  
**Height:** Up to 2000 m (above sea level)  
**Relative air humidity:** 0–100%  
**Protection class:** IP 65  
 IP 67 is achieved by piping away the exhausting air

**Protection class:** IP NEMA 4X (UL 61010-1, UL 50E), only available as special version code Y

**Degree of contamination:** 4 (pollution degree)

**Electrical data**

**Electrical connection type:**

24 V	IO-Link/AS-Interface (3.0)/ ASi-5/DeviceNet
1 x 8-pin M12 plug (A-coded)	1 x 5-pin M12 plug (A-coded)

**Supply voltage:**

24 V	IO-Link	AS-Interface (3.0) and ASi-5	DeviceNet
18 to 30 V DC (typically 24 V DC)	18 to 30 V DC (in accordance with IO- Link specification)	26.5 to 31.6 V DC (in accordance with AS- Interface specifications)	11 to 25 V DC (in accordance with DeviceNet specifica- tions)

**Current consumption:**

Flow rate code	24 V	IO-Link	AS-Interface order code: A2, A3, A4	ASi-5 order code: A5, A5D	DeviceNet
<b>01</b>	typically 80 mA	typically 80 mA	typically 100 mA	typically 80 mA	typically 65 mA
<b>02</b>	typically 120 mA	typically 120 mA	typically 150 mA	typically 120 mA	typically 100 mA
<b>03</b>	typically 100 mA	typically 100 mA	typically 120 mA	-	typically 85 mA
<b>R3</b>	-	-	-	typically 90 mA	-


**Duty cycle:** Continuous duty

**Electrical protection class:** III

**Reverse battery protec-  
tion:** yes

**Line fuse:** 630 mA medium time lag, for order code Fieldbus 000

**Switching characteristic:**

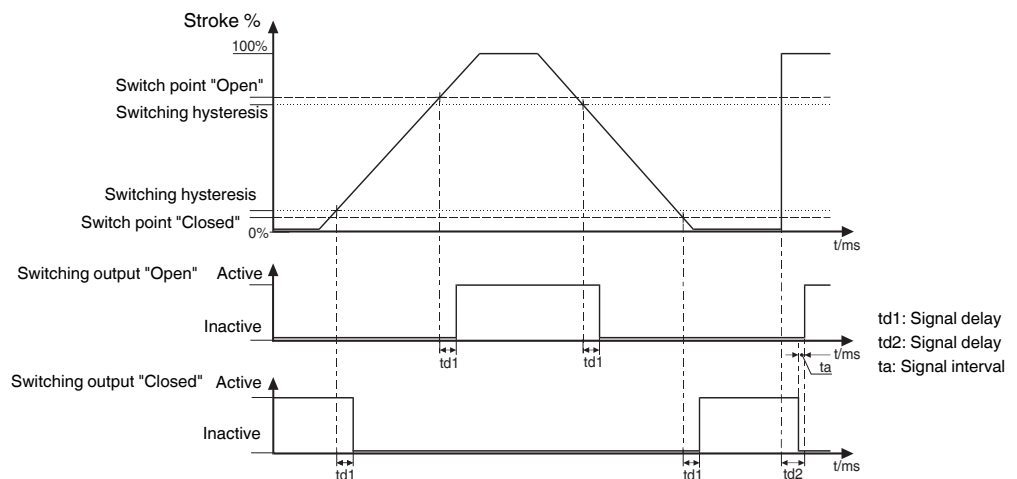

Switch points: 24 V, IO-Link, AS-Interface, DeviceNet: The data in percent refer to the programmed stroke, before each end position

Switch points: ASI-5: The data in percent refers to the programmed stroke, with reference to the lower end position (0%)

**Switch points:**

	Size 1	Size 2	
		75 mm	30 mm
<b>Default setting switch point CLOSED</b>	12%	12%	12%
<b>Default setting switch point OPEN</b>	25% (75%)	25% (75%)	25% (75%)
<b>Min. switch point CLOSED</b>	0.8 mm	2 mm	0.8 mm
<b>Min. switch point OPEN</b>	0.5 mm	1.25 mm	0.5 mm


If the percentage switch points dependent on the programmed stroke are smaller than the permissible min. switch points, the min. switch points apply automatically.

The values in brackets apply to the ASI-5 version.


## Dimensions

### Size 1

Only 30 mm travel sensor length available

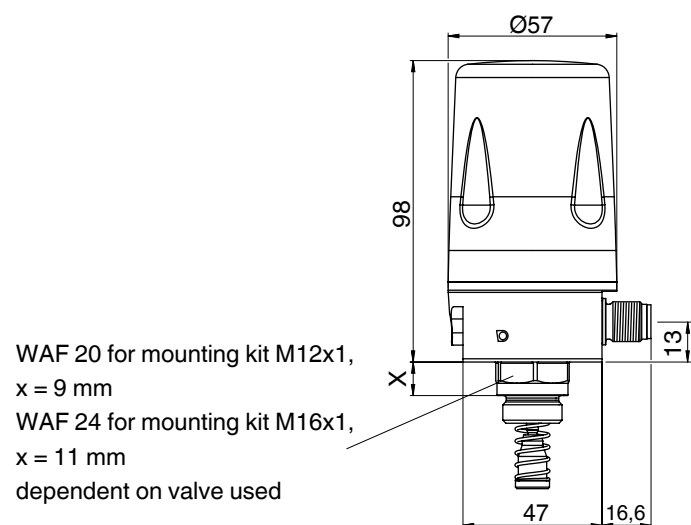


Standard  
Dimensions in mm

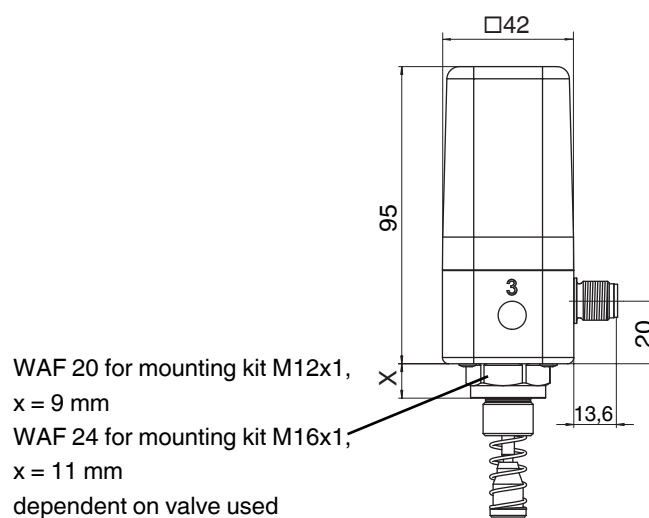


Compact  
Dimensions in mm

### Size 2

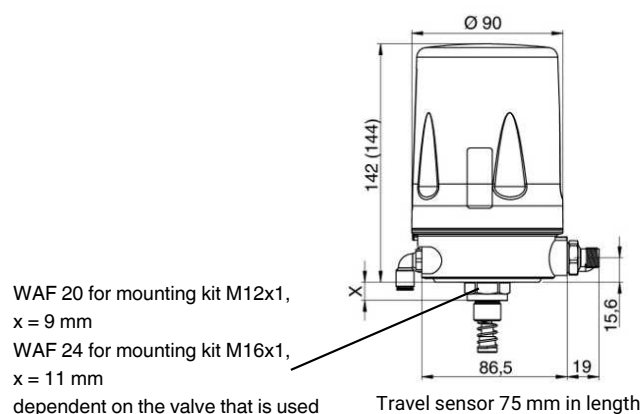

Dimensions in mm


- The dimensions in brackets apply to the ASi-5 version

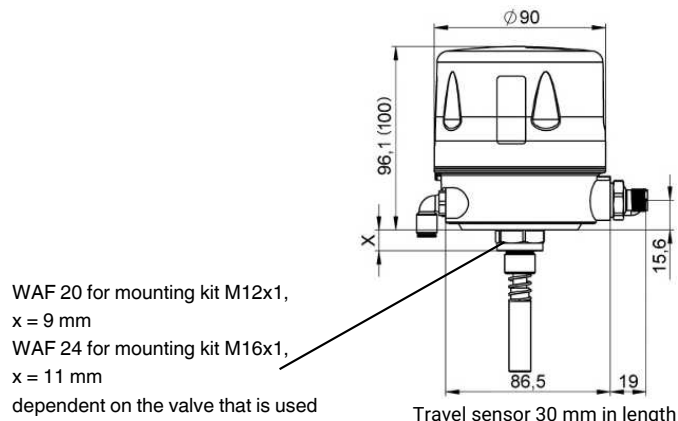

Dimensions in mm

## Pneumatic connection


### Size 1, standard, single acting

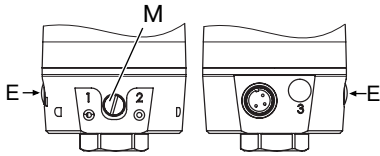

Connection	Designation	Connection size
1	Air supply connection	M5
2	Working connection for process valve	M5
3	Venting connection with integrated check valve	M6 x 0.75 <sup>1)</sup>
E	Housing ventilation with integrated check valve	M6 x 0.75
M	Manual override	-

1) only relevant for exhaust air duct and/or increase of protection class


### Size 1, standard, double acting

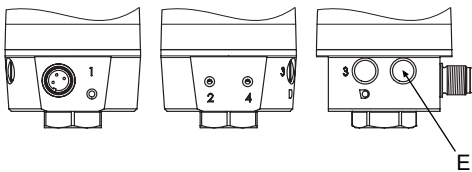

Connection	Designation	Connection size
1	Air supply connection	M5
2	Working connection for process valve	M5
3	Venting connection with integrated check valve	M6 x 0.75 <sup>1)</sup>
4	Working connection for process valve	M5
E	Housing ventilation with integrated check valve	M6 x 0.75

1) only relevant for exhaust air duct and/or increase of protection class


### Size 1, compact version

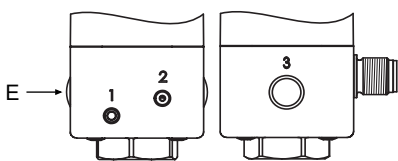

Connection	Designation	Connection size
1	Air supply connection	M5
2	Working connection for process valve	M5
3	Venting connection with integrated check valve	M6 x 0.75 <sup>1)</sup>
E	Housing ventilation with integrated check valve	M6 x 0.75


1) only relevant for exhaust air duct and/or increase of protection class

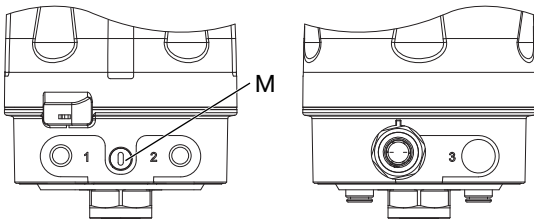

**Size 2, PPS (code 01), single acting**


Connection	Designation	Connection size
1	Air supply connection	G 1/8
2	Working connection for process valve	G 1/8
3	Venting connection with silencer (integrated housing ventilation)	G 1/8 <sup>1)</sup>
M	Manual override	-

1) only relevant for exhaust air duct and/or increase of protection class

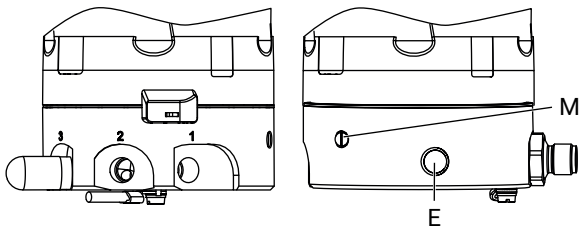**Size 2, stainless steel (code 07), single acting**

Connection	Designation	Connection size
1	Air supply connection	G 1/8
2	Working connection for process valve	G 1/8
3	Venting connection with silencer	G 1/8 <sup>1)</sup>
M	Manual override	-
E	Housing ventilation with integrated check valve	M6 x 0.75

1) only relevant for exhaust air duct and/or increase of protection class

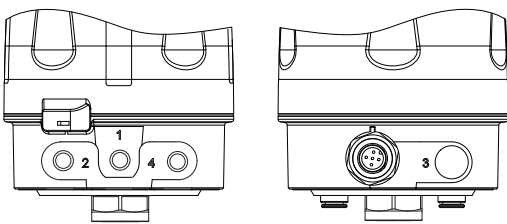**Size 2, PPS (code 01), double acting (only available for 75 mm version)**

Connection	Designation	Connection size
1	Air supply connection	G 1/8
2	Working connection for process valve	G 1/8
3	Venting connection with silencer (integrated housing ventilation)	G 1/8 <sup>1)</sup>
4	Working connection for process valve	G 1/8

1) only relevant for exhaust air duct and/or increase of protection class

## Electrical connection

### 24 V, ordering option Fieldbus, code 000

#### Pin assignment



Pin	Signal name
1	U, 24 V DC, supply voltage
2	24 V DC, Open end position output
3	U, GND
4	24 V DC, Closed end position output
5	24 V DC, programming input
6	24 V DC, control input
7	24 V DC, error output
8	n.c.

Pin 5 and pin 6 are highly active. If not used, connect to GND or leave open.

The following errors are indicated via pin 7 (error output): Sensor error, pneumatic error, programming error, internal error

#### Inputs (pin 5, 6)

**Input impedance:** min. 27 k $\Omega$


**Input voltage:** max. 30 V DC

**High level:**  $\geq 18$  V DC

**Low level:**  $\leq 5$  V DC

#### Outputs (pin 2, 4, 7)

**Internal wiring:**




**Max. switching current:**  $\pm 100$  mA

**Max. voltage drop Vdrop:** 3 V DC at 100 mA

**Switching voltage:**  $+U_v - V_{drop}$  push high  
 $-U_v + V_{drop}$  pull low

## IO-Link, ordering option Fieldbus, code IOL

### Pin assignment



Pin	Signal name
1	U, 24 V DC, supply voltage
2	n.c.
3	U, GND
4	C/Q IO-Link
5	-

## AS-Interface (3.0) and ASi-5, ordering option fieldbus, code A2, A3, A4, A5 and A5D

### Pin assignment




Pin	Signal name
1	AS-Interface +
2	-
3	AS-Interface -
4	n.c.
5	-

Ensure a potential equalisation connection for AS-Interface (3.0). Implement the potential equalisation either via a pre-assembled earthing kit or ensure that there is a sufficiently conductive connection ( $R \leq 100 \Omega$ ) to the system earth via the mechanically connected valve fitting.

Potential equalisation is not required for housing versions with a PPS base and for ASi-5 versions (except for special functions X and Y).

## DeviceNet, ordering option Fieldbus, code DN

### Pin assignment



Pin	Signal name
1	Shield
2	V+
3	V-
4	CAN_H
5	CAN_L

## Specific data - IO-Link

**Physics:** Physics 2 (3-wire design)

**Port configuration:** Port type A

**Transmission rate:** 38400 baud

**Frame type in Operate:** 2.5

**Min. cycle time:** 2.3 ms

**Vendor-ID:** 401

**Device-ID:** 424201

**Product-ID:** 4242 IO-LINK

**ISDU support:** yes

**SIO operation:** yes

<b>IO-Link specification:</b>	Size 1	Size 2
	V1.1	V1.1 when using IODD 1.1 <sup>1)</sup>

1) When using IODD 1.0.1 the device works in accordance with IO-Link specification V1.0 (compatibility mode)

**Information for IO-Link:** IODD files can be downloaded via <https://ioddfinder.io-link.com/> or [www.gemu-group.com](http://www.gemu-group.com).

## Process data

### Device → Master

Name	Bit	Values
Valve position Open	0	0 → Process valve not in Open position
		1 → Process valve in Open position
Valve position Close	1	0 → Process valve not in Closed position
		1 → Process valve in Closed position
Programming mode	2	0 → Normal operation
		1 → Programming mode

### Master → Device

Name	Bit	Values
Pneumatic outlet (single acting valve)	0	0 → Pneumatic outlet 2 vented
		1 → Pneumatic outlet 2 pressurized
Pneumatic outlet (double acting valve)	0	0 → Pneumatic outlet 2 vented, pneumatic outlet 4 <sup>1)</sup> pressurized
		1 → Pneumatic outlet 2 pressurized, pneumatic outlet 4 <sup>1)</sup> vented
Programming mode	1	0 → Normal operation
		1 → Programming mode
Locate	2	0 → Off
		1 → On

1) Activation of outlet 4, only for double acting function (code 02)

## Specific data – AS-Interface (3.0)

	A2 version	A3 version	A4 version
<b>AS-Interface specification</b>	3.0; max. 31 slaves	3.0; max. 62 slaves	3.0; max. 62 slaves
<b>AS-Interface profile</b>	S 7.F.E (4I/40)	S 7.A.E (4I/30)	S 7.A.A (8I/80)
<b>I/O configuration</b>	7	7	7
<b>ID code</b>	F	A	A
<b>ID2 code</b>	E	E	A
<b>AS-Interface approval</b>	Size 1: AS-Interface certificate No. 96001 Size 2: AS-Interface certificate No. 125601		

## Inputs

Bit	Default	Function	Version			Logic
			A2	A3	A4	
DI0	0	Indication of OPEN position	X	X	X	0 = process valve not in OPEN position 1 = process valve in OPEN position
DI1	0	Indication of CLOSED position	X	X	X	0 = process valve not in CLOSED position 1 = process valve in CLOSED position
DI2	0	Indication of operating mode	X	X	X	0 = normal operation 1 = programming mode
DI3	0	Error 2	X	X	X	see error analysis
DI4	0	Error 3	-	-	X	
DI5	0	Error 4	-	-	X	
DI6, DI7	not used		-	-	X	
PF	0	Error 1	X	X	X	see error analysis

## Outputs

Bit	Default	Function	Version			Logic
			A2	A3	A4	
DO0	0	Activation of pneumatic outlet 2	X	-	-	0 = pneumatic outlet 2 vented 1 = pneumatic outlet 2 pressurized
	0	Activation of pneumatic outlet 2 / 4	X	X	X	0 = pneumatic outlet 2 vented, pneumatic outlet 4 <sup>1)</sup> pressurized 1 = pneumatic outlet 2 pressurized, pneumatic outlet 4 <sup>1)</sup> vented
DO1	0	Activation of pneumatic outlet 4 <sup>1)</sup> (pilot valve 2)	X	-	-	0 = pneumatic outlet 4 <sup>1)</sup> vented 1 = pneumatic outlet 4 <sup>1)</sup> pressurized
		not used	X	-	-	
	0	Programming mode	-	X	-	0 = manual programming 1 = automatic programming
	0		-	-	X	0 = automatic programming 1 = manual programming
DO2	0	Setting slave in programming mode	X	X	X	0 = normal operation 1 = programming mode
DO3	0	Programming mode	X	-	-	0 = manual programming 1 = automatic programming
	0	Function of high visibility position indicator	-	-	X	0 = activated 1 = deactivated
DO4	0	Inversion of feedback signals	-	-	X	0 = standard 1 = inverted
DO5	0	Inversion of LED colours	-	-	X	0 = standard 1 = inverted
DO6	0	Location function	-	-	X	0 = deactivated 1 = activated
DO7	0	On-site programming	-	-	X	0 = enabled 1 = disabled

1) Activation of outlet 4, only for double acting function (code 02)

## Specific data – ASi-5

AS-Interface specification: ASi-5 Spec. V1.04 Rev. 1

### Cyclical process data

#### Inputs

Inputs (Slave → Master)			
Byte (address)	Bit	Default setting	Logic
0	DI0	Indication of OPEN position	0 = process valve not in OPEN position 1 = process valve in OPEN position
	DI1	Indication of CLOSED position	0 = process valve not in CLOSED position 1 = process valve in CLOSED position
	DI2	Indication of operating mode	0 = normal operation 1 = active initialization
	DI3	Off	
	DI4	Off	
	DI5	Off	
	DI6	Off	
	DI7	Off	
1 to 2	DI8 to DI21	Current valve position (0 to 1000)	-

Device-side digital output signals can be used to output various statuses, such as limit values / errors / alarms.  
→ The statuses are set in the corresponding parameters

Function of digital outputs 1 to 8 (slave outputs)	0	Default setting	Logic
	0	Off	Without function
	1	Indication of OPEN position	Valve position OPEN feedback
	2	Indication of CLOSED position	Valve position CLOSED feedback
	3	Error output	Signals an active error
	4	Warning message output	Signals an active warning
	5	Indication of operating mode	Feedback of the active operating mode → normal operation / initialisation active
	6		

## Outputs

Outputs (Master → Slave)			
Byte (address)	Bit	Default setting	Logic
0	D00	Controlling pneumatic outputs	0 = pneumatic outputs vented 1 = pneumatic outputs pressurized
	D01	Off	
	D02	Initialization	0 = normal operation 1 = initialization mode
	D03	Localization	0 = localization inactive 1 = localization active
	D04	Off	
	D05	Off	
	D06	Off	
	D07	Off	
1...2	D08 to D021	Not used	

Device-side digital input signals can be used to start various actions, such as start initialization / pilot valve actuation / approaching a specified position, etc. → The actions are set in the corresponding parameters			
Function of digital inputs 1 to 8 (slave inputs)	0	Off	No function
	1	Controlling pneumatic outputs	Activates the pneumatic output
	2	Unavailable	Unavailable
	3	Initialization	Starting initialization
	4	Localization	Activates the location function
	5	Safe/On	If the signal is not active, the position defined in the "ErrorAction" (0x004F) parameter is approached. If the signal is active, normal operation is carried out in accordance with external signals.
	6		

## Specific data - DeviceNet

### General data

Communication modes: Function, Polling, Change of state, Cyclic, Bit strobe

Identity				
Class	Inst.	Attr.	Function	Value
1h	1h	1h	Vendor ID	869
		2h	Product Type	48
		3h	Product Code	4242
		4h	Rev.	2.2 <sup>1)</sup>
		5h	Status	Device status according to DeviceNet specifications
		6h	Series No.	Continuous serial number
		7h	Name	4242 DN combi switchbox


1) Use EDS file in accordance with revision status of the device

Note: Download EDS files from [www.gemu-group.com](http://www.gemu-group.com)



## Net topology - DeviceNet system

To avoid malfunction the trunk cable is fitted with resistors on both sides. The drop cables do not require bus ends.

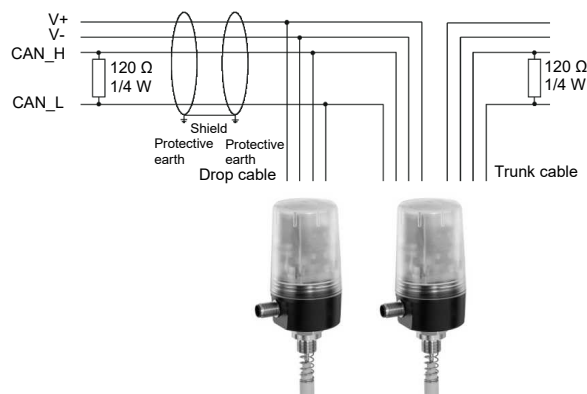

### Maximum cable length

Baud rate [kBaud]	Trunk cable		Drop cable	
	Thick cable	Thin cable	Max. cable length per drop cable	Max. drop cable accumulated length
125	500 m	100 m	6 m	156 m
250	250 m	100 m	6 m	78 m
500	100 m	100 m	6 m	39 m

### Inputs

Bit	Default	Designation	Function	Logic
0	0	State Valve 1	Status query pneumatic outlet 2 (pilot valve 1)	0 = pneumatic outlet 2 vented 1 = pneumatic outlet 2 pressurized
1	0	State Valve 2	Status query pneumatic outlet 4 (pilot valve 2)	0 = pneumatic outlet 4 vented 1 = pneumatic outlet 4 pressurized
2	0	Programmingmode	Feedback for operating mode	0 = normal operation 1 = programming mode
3	0	Position Closed	Feedback CLOSED position	0 = process valve not in CLOSED position 1 = process valve in CLOSED position
4	0	Position Open	Feedback OPEN position	0 = process valve not in OPEN position 1 = process valve in OPEN position
5	0	Calibrationmode	Feedback calibration mode	0 = normal operation 1 = calibration mode
6	0	Global warnings	General warning	0 = warning not active 1 = warning active
7	0	Global errors	General error	0 = error not active 1 = error active

As seen from the DeviceNet master, Class 64h, Inst. 1h, Attr. 1h

## Outputs

Bit	Default	Designation	Function	Logic
0	0	active valve 1	Activation of pneumatic outlet 2 (pilot valve 1)	0 = pneumatic outlet 2 vented 1 = pneumatic outlet 2 pressurized
1	0	active valve 2	Activation of pneumatic outlet 4 <sup>1)</sup> (pilot valve 2)	0 = pneumatic outlet 4 <sup>1)</sup> vented 1 = pneumatic outlet 4 <sup>1)</sup> pressurized
2	not used			
3	0	Location function	Location function	0 = location function not active 1 = location function active
4	not used			
5	0	Manual programming	Manual programming mode	0 = manual programming mode not active 1 = manual programming mode active
6	0	Automatic programming	Automatic programming mode:	0 = automatic programming mode not active 1 = automatic programming mode active
7	not used			

As seen from the DeviceNet master, Class 64h, Inst. 1h, Attr. 1h

1) Activation of outlet 4, only for double acting function (code 02)

## Accessories



### GEMÜ 1219

#### Cable socket / cable plug M12

The GEMÜ 1219 is a connector (cable socket / cable plug) M12, 5-pin. Straight and/or 90° angled plug type. Defined cable length or with threaded connection without cable. Various materials available for the threaded ring.

Description	Length	Order number
5-pin, angle	without cable	88205545
	2 m cable	88205534
	5 m cable	88205540
	10 m cable	88210911
	15 m cable	88244667
5-pin, straight	without cable	88205544
	2 m cable	88205542
	5 m cable	88205543
	10 m cable	88270972
	15 m cable	88346791
8-pin, angle	5 m cable	88374574
8-pin, straight	without cable	88304829



### GEMÜ 1560

#### IO-Link master

The GEMÜ 1560 IO-Link master is used for parametrization, actuation, commissioning and for evaluating process and diagnostics data on products with IO-Link interface with communication standard in accordance with IEC 61131-9. The IO-Link master is available with USB port for use on a computer or with a Bluetooth or WLAN interface for use on mobile devices (iOS and Android). GEMÜ 1560 can be ordered separately or as a set for GEMÜ products including the required adapter.

Description	Order designation	Order number
IO-Link master kit (adapter plus cable)	1560USBS 1 A40A12AU A	99072365
IO-Link master kit (adapter plus cable)	1560 BTS 1 A20A12AA A	99130458



### GEMÜ 4242000ZMA

#### Programming magnet

The programming magnet is used to start automatic initialization.

Order number: 88377537



**GEMÜ 4180**

**AS-Interface connector**

AS-Interface connector (M12 on AS-Interface, flat cable)

Order number: 88073531



GEMÜ Gebr. Müller Apparatebau GmbH & Co. KG  
Fritz-Müller-Straße 6-8, 74653 Ingelfingen-Criesbach, Germany  
Phone +49 (0) 7940 1230 · info@gemue.de  
www.gemu-group.com