

GEMÜ C33 HydraLine

Pressure transducer



Features

- Membrane is an integral part of the sensor envelope
- Non-metallic ultra pure ceramic sensor
- Media wetted area made exclusively of PTFE
- Plastic housing for aggressive ambient conditions
- Production, assembly, calibration and packaging in cleanroom ISO 6

Description

The GEMÜ C33 HydraLine electronic pressure gauge comprises a PTFE body and a housing made of PTFE, PVDF and FKM. It has a ceramic pressure measurement cell which is separated from the process medium by an innovative new sealing concept. This means the process medium only comes into contact with PTFE. The GEMÜ C33 HydraLine has a leak detection hole for easy leakage detection and can be integrated directly into the piping system via flare unions.

Technical specifications

- **Measuring range:** 0 Up to 6 bar Or 0 Up to 100 psi; for further measuring ranges, see Range overview
- **Error of measurement:** $\pm 1\%$ of final value ; for further error of measurements, see Range overview
- **Input signals:** 4–20 mA
- **Media temperature :** 0 to 80 °C
- **Ambient temperature:** 0 to 60 °C
- **Body materials:** PTFE
- **Connection type:** Flare | Nexus Connect®

Technical data depends on the respective configuration

further information
webcode: GW-C33



Product description



Item	Name	Material
1	Cable*	FEP encapsulated
2	Housing*	PVDF, FKM
3	Housing (separation of media)**	PTFE
4	Body**	PTFE

* not media wetted

** media wetted

Range overview

Availability of measuring range

Depending on the combination with the relevant codes, the respective measuring range can be selected:

Measuring range	Unit [bar]	Unit [psi]	Error of measurement
Code	Code B	Code P	
JK	0.0–2.5	0–30	± 1.5% FS
BK	0.0–6.0	0–100	± 1.0% FS

Order data

The order data provide an overview of standard configurations.

Please check the availability before ordering. Other configurations available on request.

Order codes

1 Type	Code	5 Housing material	Code
Pressure gauge with ceramic pressure sensor	C33	PTFE polytetrafluoroethylene, white	SP
2 Connection size	Code	6 Diaphragm material	Code
1/4", international code: 4	4	Modified PTFE, polytetrafluoroethylene	26
3/8", international code: 6	6		
1/2", international code: 8	8		
3/4", international code: 12	12		
1", international code: 16	16		
3 Mounting version	Code	7 Unit	Code
Dead-end	E	bar	B
In-line	L	psi	P
4 Connection type	Code	8 Measuring range	Code
Flare connection with CPFA union nut	73	0–30 psi, 0.0–2.5 bar	BJ
Flare connection with PVDF union nut	75	0–100 psi, 0.0–6.0 bar	BK
Flare connection with PFA union nut	77		
Nexus Connect connection with PFA union nut	NX		
9 Connection type	Code	10 Display	Code
Cable outlet with 2 m flying lead, (FEP encapsulated), IP 67	K	Without	Z
11 High Purity version	Code		
High Purity, white	HPW		

Order example

Ordering option	Code	Description
1 Type	C33	Pressure gauge with ceramic pressure sensor
2 Connection size	8	1/2", international code: 8
3 Mounting version	L	In-line
4 Connection type	73	Flare connection with CPFA union nut
5 Housing material	SP	PTFE polytetrafluoroethylene, white
6 Diaphragm material	26	Modified PTFE, polytetrafluoroethylene
7 Unit	B	bar
8 Measuring range	BK	0–100 psi, 0.0–6.0 bar
9 Connection type	K	Cable outlet with 2 m flying lead, (FEP encapsulated), IP 67
10 Display	Z	Without
11 High Purity version	HPW	High Purity, white

Technical data

Medium

Working medium: Corrosive, inert, gaseous and liquid media which have no negative impact on the physical and chemical properties of the body and seal material.

Temperature

Media temperature: 0 – 80 °C

Ambient temperature: 0 – 60 °C

Mechanical data

Installation position: Optional

Flow direction: Optional

Protection class: IP 67

Mounting version: In-Line and Dead-End

Connection cable: 2 m, flying lead, FEP encapsulated, bend radius \geq 20 mm

Weight: 500 g (In-Line 1/2")

Electrical data for measuring transducer

Supply voltage: 12–30 V DC

Output signal: 4–20 mA, two-wire

Error of measurement: $\pm 1\%$ FS (100 psi and 6 bar, according to DIN EN 61298-2)

$\pm 1.5\%$ FS (30 psi and 2.5 bar, according to DIN EN 61298-2)

Jump response time:

Jump	response time
10–90% of measuring range	Typically 70 ms
5–15% of measuring range	Typically 50 ms
45–55% of measuring range	Typically 50 ms
85–95% of measuring range	Typically 50 ms

Duty cycle: Continuous duty

Reverse polarity protection: yes

Short-circuit resistance: yes

Pressure

Measuring range: 0–30 psi (code P and JK)
0–2.5 bar (code B and JK)
0–100 psi (code P and BK)
0–6 bar (code B and BK)

Product conformity

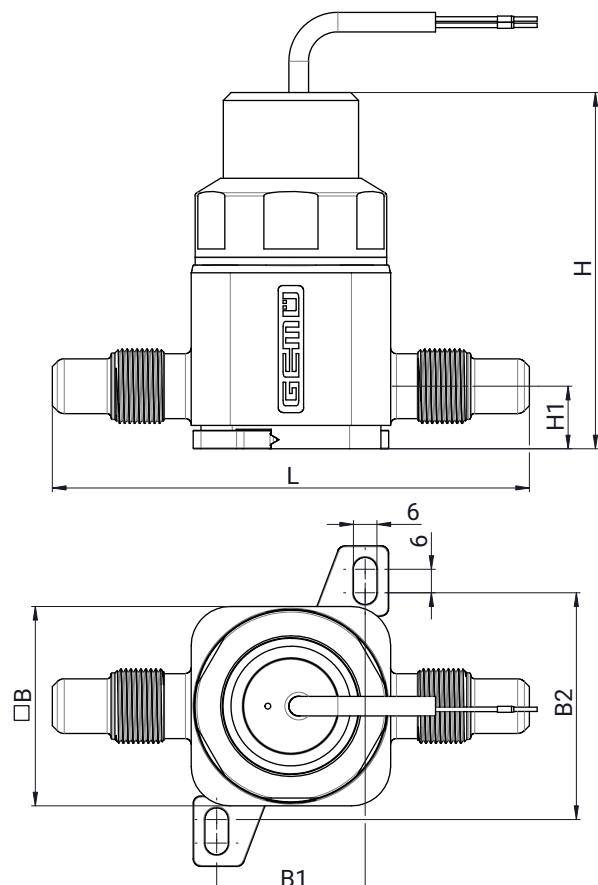
Pressure Equipment Directive: 2014/68/EU
directive:

EMC Directive: 2014/30/EU

RoHS Directive: 2011/65/EU

Dimensions

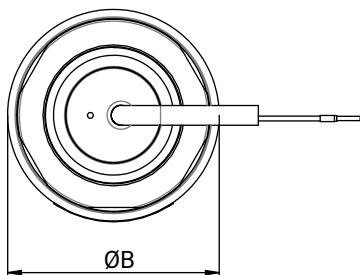
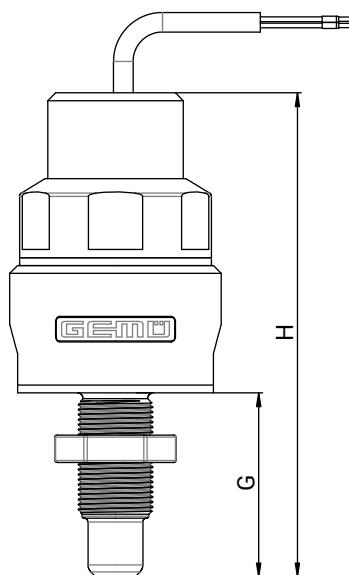
In-Line (Code L)



Connection	B	B1	B2	H	H1	L
3/8" Flare*	51.0	38.0	61.0	88.6	15.0	118.0
1/2" Flare*	51.0	38.0	61.0	91.1	16.0	122.0
3/4" Flare*	51.0	38.0	61.0	98.1	19.0	122.0
1" Flare*	55.0	43.0	65.0	106.8	25.0	165.0
3/8" Nexus*	51.0	38.0	61.0	90.6	17.0	81.0
1/2" Nexus*	51.0	38.0	61.0	94.1	19.0	86.0
3/4" Nexus*	51.0	38.0	61.0	102.1	23.0	95.0
1" Nexus*	55.0	43.0	65.0	110.1	28.42	109.0

Dimensions in mm

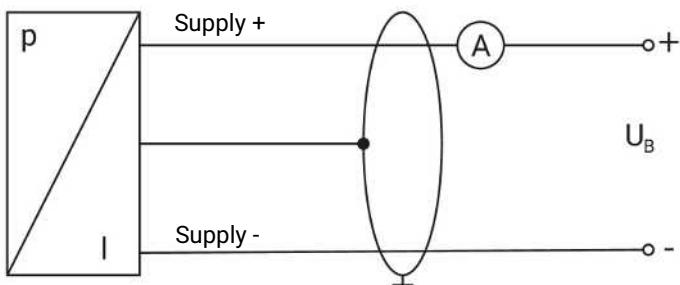
* Overall dimension (installation dimension) without union nuts

Dead-end (Code E)

Connection	B	G	H
1/4" Flare*	54.0	44.0	120.6
1/2" Flare*	54.0	47.0	123.6
1/4" Nexus*	54.0	11.0	87.6
1/2" Nexus*	54.0	17.5	94.1

Dimensions in mm

* Overall dimension (installation dimension) without union nuts

Electrical connection

Strand colour	Function	Supply voltage	Analogue signal
White	Supply +	12–30 V DC	4–20 mA
Brown	Supply -		
Green-yellow	Shield	-	-

